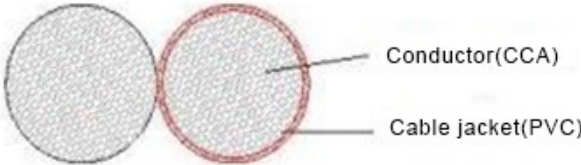


Technical specification/ Data sheet

Loudspeaker cable: FB-0.50 CA

Specification													
Product description Unshielded double line with stranded core made of CCA Intended use Interconnection of loudspeaker systems For the transmission of low frequency signals Construction 2 cores _____ insulation wires	FB-0.50CA 												
Cable construction <table><tr><td>Inner Conductor</td><td>Copper-clad aluminium</td></tr><tr><td>Diameter of inner conductor</td><td>0.16mm×25</td></tr><tr><td>Conductor cross section</td><td>0.5mm²</td></tr><tr><td>Cable jacket</td><td>PVC</td></tr><tr><td>Diameter</td><td>2.2×4.4mm</td></tr><tr><td>Color</td><td>Transparent</td></tr></table>	Inner Conductor	Copper-clad aluminium	Diameter of inner conductor	0.16mm×25	Conductor cross section	0.5mm ²	Cable jacket	PVC	Diameter	2.2×4.4mm	Color	Transparent	
Inner Conductor	Copper-clad aluminium												
Diameter of inner conductor	0.16mm×25												
Conductor cross section	0.5mm ²												
Cable jacket	PVC												
Diameter	2.2×4.4mm												
Color	Transparent												
Marking FB-0.50 FlexBox LOUDSPEAKER HI-FI CABLE 0.50 mm2 ISO9002 Euroclass Eca													